

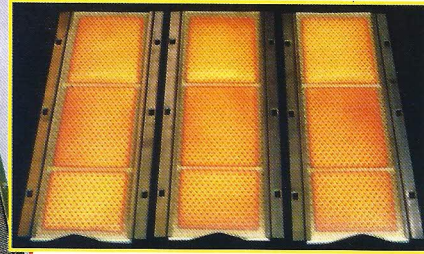
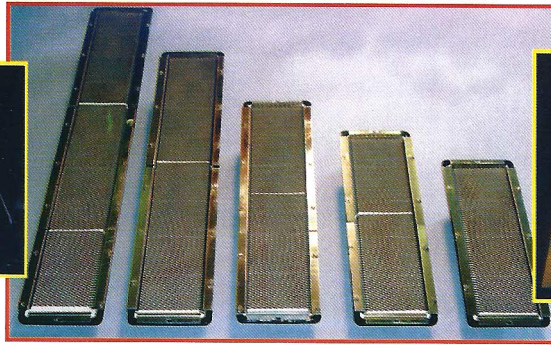



Technical SPECIFICATIONS




Model	Nominal Heat Input				Length 'A'	No. of Tiles	Weight kg
	Standard		Supersaver				
	Btu/hr.	kW	Btu/hr.	kW			



W12	12,500	3.7	9,700	2.8	214	2	0.7
-----	--------	-----	-------	-----	-----	---	-----



W28	28,000	8.2	21,000	6.1	400	4	1.9
W35	35,000	10.2	26,250	7.6	490	5	2.3
W40	40,000	11.7	30,000	8.8	584	6	2.8
W45	45,000	13.1	33,750	9.8	675	7	3.1
W50	50,000	14.6	37,500	11.0	767	8	3.5
W55	55,000	16.1	41,250	12.1	857	9	3.9
W60	60,000	17.6	45,000	13.2	947	10	4.3
W65	65,000	19.1	48,750	14.3	1037	11	4.7



L09	9,000	2.6	6,750	2.0	203	1½	0.9
L12	12,000	3.5	9,000	2.6	268	2	1.1
L15	15,000	4.4	11,250	3.3	333	2½	1.3
L18	18,000	5.3	13,500	4.0	398	3	1.6
L24	24,000	7.0	18,000	5.3	528	4	2.0

- ⚡ Venturi position can be lengthened to suit customers requirements.
- ⚡ When ordering burners please specify type of gas, calorific value and operating pressure required otherwise it will be assumed Natural Gas 20 millibar, Propane Gas 37 millibar and Butane 28 millibar.
- ⚡ Restriction on heat outputs available by blocking out central tiles to ensure even distribution and lower intensity of heat.
- ⚡ Gas connections - All burners can be supplied with either 1/4" or 3/8" BSP.
- ⚡ Should larger burners be required they can be linked and manifolded together to create the required size.

Other literature in our range includes: Corporate Brochure, Space Heater Leaflet, Price Lists
Data Sheets: Combustion Systems, Paint Drying, Catering Equipment



Infraglo (Sheffield) Ltd, Dannemora Drive,
Greenland Road Industrial Park, Sheffield S9 5DF

Telephone: 0114 249 5445 Facsimile: 0114 249 5066